

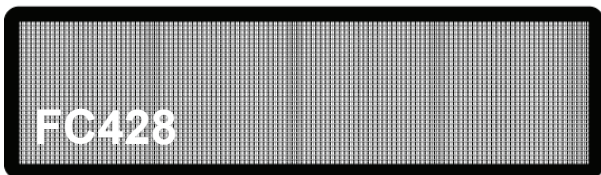
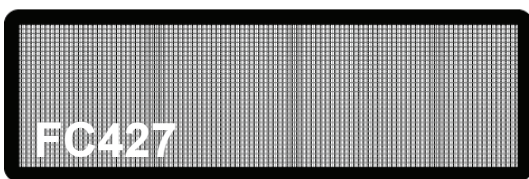
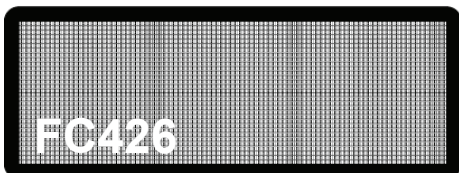
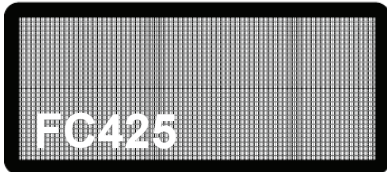





# **FC 400 Series**

## **Indoor Full Color Display**



- **Unlimited ADs**
- **Extremely Bright**
- **Energy Efficient**
- **Very Colorful**
- **High Impact**
- **Built-in Animations**



Model Number	Height (in)	Width (in)	Height (mm)	Width (mm)	Height (px)	Width (px)	Weight (lbs)
FC413	19	53	482.6	1016	16	48	22
FC414	19	70	482.6	1778	16	64	25
FC415	19	87	482.6	2209.8	16	80	28
FC416	19	103	482.6	2616.2	16	96	31
FC417	19	120	482.6	3048	16	112	34
FC418	19	137	482.6	3479.8	16	128	37
FC424	36	70	914.4	1778	32	64	50
FC425	36	87	914.4	2209.8	32	80	56
FC426	36	103	914.4	2616.2	32	96	62
FC427	36	120	914.4	3048	32	112	68
FC428	36	137	914.4	3479.8	32	128	74

**NOTES** - Approximate dimensions, power and weight. Due to continuing product innovations, all specifications are subject to change without notice.  
 - Additional sizes/configurations available. Call for quote.

Common Specifications	
Pixel Composition	1 Red, 1 pGreen , 1 Blue
Pixel Pitch	26mm
Display Colors	Full Color
Viewing Angle	70° (Horizontal) / 30° (Vertical)
Operating Temperature	-20°C - 50°C / -4°F - 122°F
Input Currency	AC 88 - 264VAC
Output voltage	5V

Ideal Application Solutions		
Auto Malls	Department Stores	Trade Shows
Game Shows	Entertainment Stadiums	Carnivals and/or Fairs