

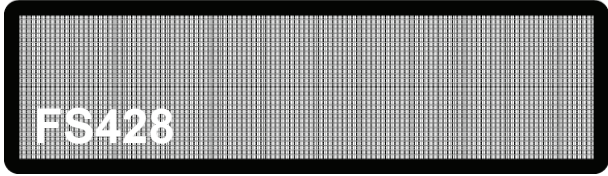
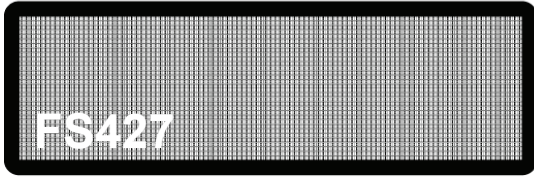
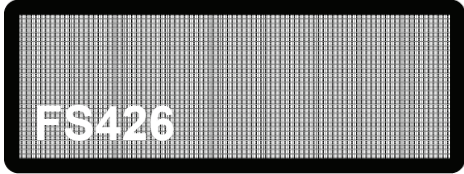
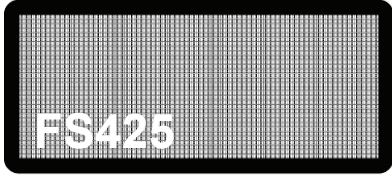






FS 400 Series
Indoor Single Color Display



- Unlimited ADs
- Extremely Bright
- Energy Efficient
- Brilliant Color
- High Impact
- Built-in Animations



Model Number	Height (in)	Width (in)	Height (mm)	Width (mm)	Height (px)	Width (px)	Weight (lbs)
FS413	19	53	482.6	863.6	16	48	22
FS414	19	70	482.6	1778	16	64	25
FS415	19	87	482.6	2209.8	16	80	28
FS416	19	103	482.6	2616.2	16	96	31
FS417	19	120	482.6	3048	16	112	34
FS418	19	137	482.6	3479.8	16	128	37
FS424	36	70	914.4	1778	32	64	50
FS425	36	87	914.4	2209.8	32	80	56
FS426	36	103	914.4	2616.2	32	96	62
FS427	36	120	914.4	3048	32	112	68
FS428	36	137	914.4	3479.8	32	128	74

NOTES - Approximate dimensions, power and weight. Due to continuing product innovations, all specifications are subject to change without notice.
 - Additional sizes/configurations available. Call for quote.

Common Specifications	
Pixel Composition	1 Red / 1 Green / 1 Yellow
Pixel Pitch	26mm
Display Colors	Red / Green / Yellow
Viewing Angle	70° (Horizontal) / 30° (Vertical)
Operating Temperature	-20°C - 50°C / -4°F - 122°F
Input Currency	AC 88 - 264VAC
Output voltage	5V

Ideal Application Solutions		
Auto Malls	Department Stores	Trade Shows
Game Shows	Entertainment Stadiums	Carnivals and/or Fairs

FS 413 - FS 416 Up to 2 Lines Remote Control

FS 417 - FS 418 Up to 2 Lines, Remote Control, SunNet Software Included

FS 424—FS 428 Up to 4 lines, Remote Control, SunNet Software Included