


### Cabinet Parameter

Pixel Pitch	11.125 mm
Module Resolution	28 x28
Module Size	311.5mmx311.5mm
Cabinet Resolution	84x84
Cabinet Size	934.5mmx934.5mmx80mm
LED	3-in-1 SMD (1R1G1B, 5050)
Brightness	≥6000 nits
Viewing Angle	Horizontal 140 ° & Vertical 140 °
Drive Mode	static, constant current
Weight	≤30 kg per aluminum cabinet
Refresh Frequency	2000Hz
Power Consumption	Max:1000W/m <sup>2</sup> Average: 300W/m <sup>2</sup>
Min. Viewing Distance	10 m
Protection Ratings	IP65



### Features


- ★ LED Type: 3-in-1 SMD 5050 with bigger chips and higher thickness;
- ★ IC Type: MBI 5042 with high refresh frequency;
- ★ Poly Carbonate housing used for moisture protection;
- ★ 2-in-1 integrated power & signal cable;
- ★ With matte glue-puring housing;
- ★ Each cabinet less than 80 mm thickness;
- ★ Each cabinet (934.5mmx934.5mm) less than 30 kg weight;

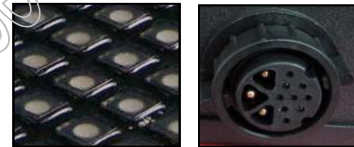

PC Housing mounted on LEDs

2-in-1 socket

### Connection Sketch

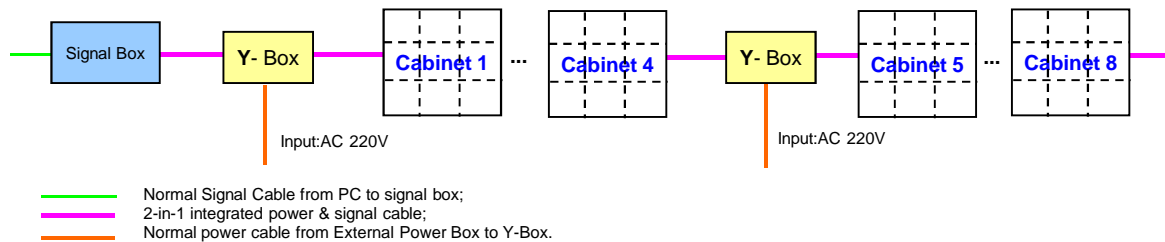

Signal Box




Y-Box  
(1-in-1 socket)




Y-Box  
(2-in-1 socket)

Real Images

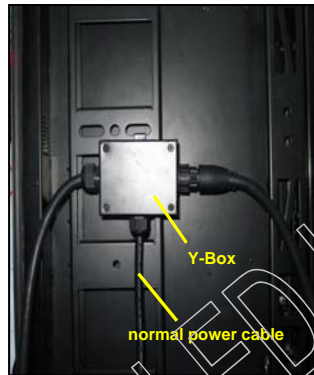

P11.125 Project in size 180 sq.m

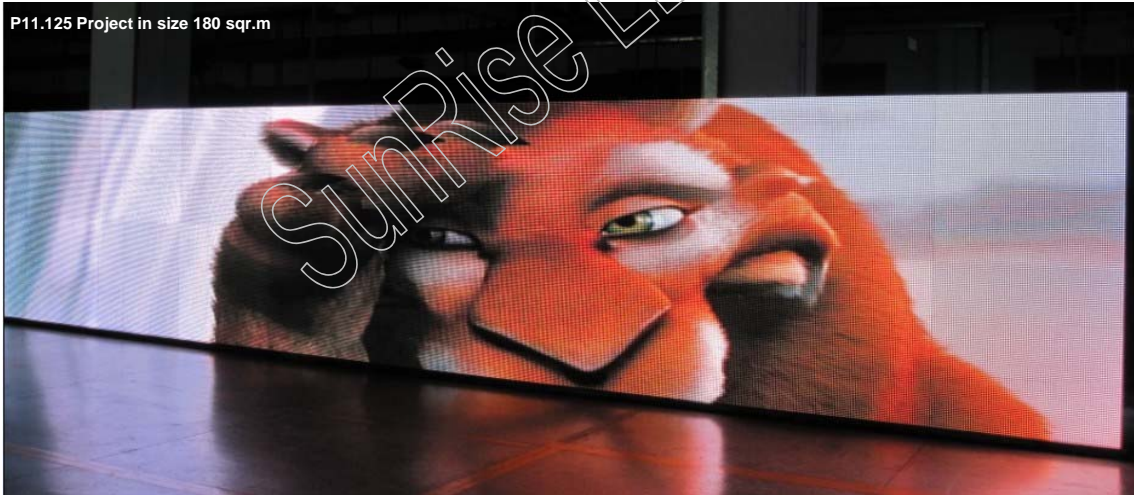



**SunRise LED Inc.** has been a leader in developing industrial LED DISPLAY products and the latest is the P11.125 Outdoor slim line.

The P11.125 outdoor LED display screen, is excellent for shopping malls, commercial areas and entertainment, venues etc.

This display is a great investment for rental companies and permanent instillation as well.

Other SunRise LED Products Include:

Indoor: P4/P6/P7.62/P8/P10/P12;

Outdoor:

P10/P11.125/P12/P16/P18/P20/P22/P25/P31.25;

Curtain LED display: P18/P20.83/P25/P36/P40.

For more information contact the dealer nearest you.

Our Goal is to provide lasting value, top quality, reliable performance,  
and exceptional sales/service, at the best price.